



Mastek Twin Macerator Dribble Bar

Twin Macerator Dribble Bar is available in 12m and 16m Double Fold, 16m & 18m in Triple Fold

Umbilical Applicators

Optional Extras:

- Touch screen operating system
- Splashplate
- Smart Spread Flow meter compatible with 10" Tablet or ISOBUS
- Can be supplied with Skate Board for JD Harvest Lab
- Quick Release 800m or 1200m Reeler

Features:

- Two Mastek SuperCut Micro macerators
- Double door access to macerator with stone trap
- Fits any tanker with linkage
- LS load sensing hydraulics come as standard
- Hydraulic break-away arms
- LED Lights



Spreading **Sustainability**
REDUCING EMISSIONS



www.mastek.ie

Mastek Ltd Ireland
Cootehill Business Park
Cootehill
Co. Cavan
H16 DX45, Ireland
Tel: +353 (0) 49 555 5953
Email: enquiries@mastek.ie

Mastek Ltd UK
Alderton Farm
Harmer Hill, Shrewsbury
Shropshire
SY4 3EL United Kingdom
Tel: + 01939 220079
Email: uksales@mastek.ie

Product Specifications


Working Width	Transport Height	Closed Width	No. of Outlets	Weight	Depth
12m	3.4m	2.35m	48	1420kg	1.2m
15m (2-stage fold)	4.3m	2.35m	56	1600kg	1.2m
15m (3-stage fold)	3.4m	2.35m	56	1650kg	1.2m
16m (2-stage fold)	4.6m	2.35m	56	1625kg	1.2m
16m (3-stage fold)	3.4m	2.35m	56	1675kg	1.2m
18.15m (3-stage fold)	3.5m	2.35m	72	2050kg	1.2m

Mastek Super Cut Macerator

All Mastek products are fitted with Mastek Super Cut Macerator. It will macerate and distribute evenly with our 48 outlet macerator, even on the most hilly conditions. This is achieved by our air breather one-way valves, which are uniquely placed above every outlet pipe. This valve sucks in the air as the serrated knife-cutters pass by each outlet, allowing the slurry to flow without resistance or air-locking. This system gives a $\pm 98\%$ accurate distribution. Each sideplate screen can be supplied with various hole sizes to increase and decrease the slurry flow.

Features:

- Capable of cutting high-fibre slurry
- Even outlet distribution
- 2.5m of long-life combined cutter blades edge
- Individual air breathers for each outlet pipe
- Available in 40mm & 45mm tube with 28,30, 40 or 48 outlets
- Low maintenance
- Easy access door
- Hydraulic motor protection

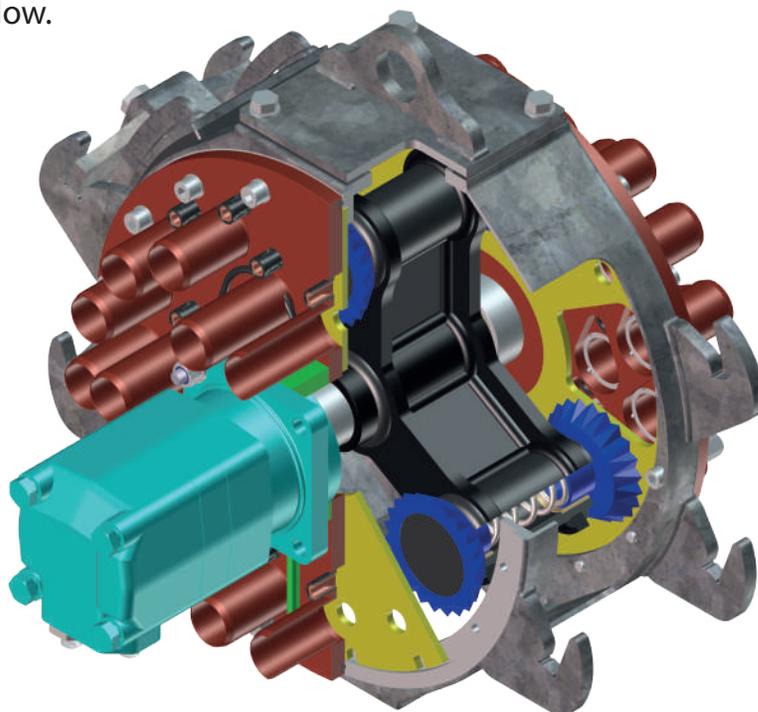

Spreading **Sustainability**
REDUCING EMISSIONS



www.mastek.ie

Mastek Ltd Ireland
Cootehill Business Park
Cootehill
Co. Cavan
H16 DX45, Ireland
Tel: +353 (0) 49 555 5953
Email: enquiries@mastek.ie

Mastek Ltd UK
Alderton Farm
Harmer Hill, Shrewsbury
Shropshire
SY4 3EL United Kingdom
Tel: + 01939 220079
Email: uksales@mastek.ie