



Tanker Applicators

Optional Extras:

- 3-point linkage umbilical attachment
- Load-sensing hydraulic system
- Umbilical attachment
- Touch screen operating system
- Can be supplied with Skate Board for JD Harvest Lab
- Smart Spread Flow meter compatible with 10' Tablet or ISOBUS

Mastek Eco Trailing Shoe

Mastek Eco Trailing Shoe applies the slurry at ground level and cattle can graze within a couple of days. The spring and boot ensure slurry is placed at the roots. This approach increases the amount of Nitrogen needed for grass. Mastek Eco Trailing Shoe fits any new or existing tanker that has trailing shoe brackets. EACH spring is capable of taking 8 kg of loading, ensuring the slurry is placed under the grass cover. Like all Mastek products the Eco Shoe is fitted with a Mastek Supercut Macerator.



Spreading **Sustainability**
REDUCING EMISSIONS



www.mastek.ie

Mastek Ltd Ireland
Cootehill Business Park
Cootehill
Co. Cavan
H16 DX45, Ireland
Tel: +353 (0) 49 555 5953
Email: enquiries@mastek.ie

Mastek Ltd UK
Alderton Farm
Harmer Hill, Shrewsbury
Shropshire
SY4 3EL United Kingdom
Tel: + 01939 220079
Email: uksales@mastek.ie

Product Specifications


Working Width	Transport Height	Closed Width	No. of Outlets	Weight	Depth
9.2m	2.4m	2.54m	40	725kg	1.3m
10.2m	2.4m	2.54m	44	1120kg	1.3m

Mastek Super Cut Macerator

All Mastek products are fitted with Mastek Super Cut Macerator. It will macerate and distribute evenly with our 48 outlet macerator, even on the most hilly conditions. This is achieved by our air breather one-way valves, which are uniquely placed above every outlet pipe. This valve sucks in the air as the serrated knife-cutters pass by each outlet, allowing the slurry to flow without resistance or air-locking. This system gives a $\pm 98\%$ accurate distribution. Each sideplate screen can be supplied with various hole sizes to increase and decrease the slurry flow.

Features:

- Capable of cutting high-fibre slurry
- Even outlet distribution
- 2.5m of long-life combined cutter blades edge
- Individual air breathers for each outlet pipe
- Available in 40mm & 45mm tube with 28,30, 40 or 48 outlets
- Low maintenance
- Easy access door
- Hydraulic motor protection

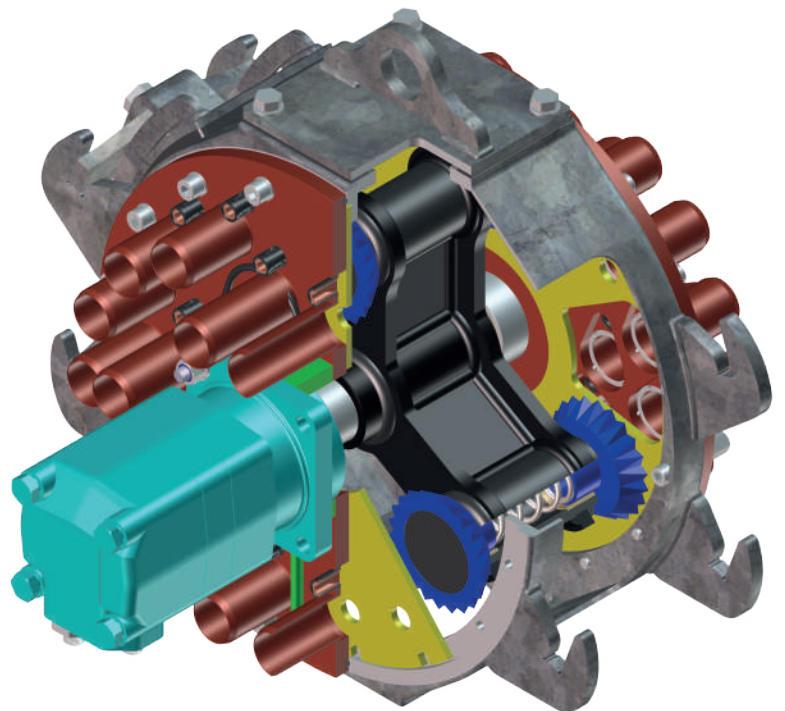

Spreading **Sustainability**
REDUCING EMISSIONS



www.mastek.ie

Mastek Ltd Ireland
Cootehill Business Park
Cootehill
Co. Cavan
H16 DX45, Ireland
Tel: +353 (0) 49 555 5953
Email: enquiries@mastek.ie

Mastek Ltd UK
Alderton Farm
Harmer Hill, Shrewsbury
Shropshire
SY4 3EL United Kingdom
Tel: + 01939 220079
Email: uksales@mastek.ie